




## Accutrol AVC6000 Round Revit Files

Revit files are isometric drawings used commonly in building construction. Accutrol provides Revit files for all AccuValve Products for use in floor plans, building diagrams, submittals, etc. The files also contain valve specific information in the properties table such as valve length, diameter Max CFM, Min CFM, etc. The Product Revit files can be found by navigating to the system documentation at [AccutrolLLC.com](http://AccutrolLLC.com).

**Note:** Make sure after installation that the keep-out zone pictured in yellow is free of obstructions.

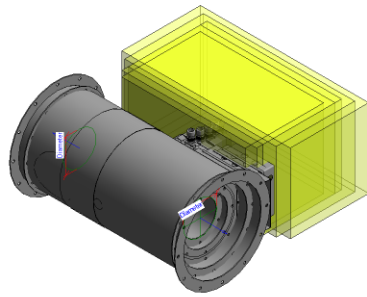

Visibility	
Clearance	<input checked="" type="checkbox"/>
Flange	<input checked="" type="checkbox"/>
Without Flange	<input type="checkbox"/>

### Valves with Zone and Flanges:

The Revit Family shows all the Valves (6,8,10,12,14) concentrically aligned. The yellow keep-out zone and valve flanges can be toggled on or off for valves of any size with a Revit license.

#### 6" Valve Properties

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Clear. Material	Clear.
<b>Dimensions</b>	
V Radius	3.000"
Mean Radius	2.940"
L	22.000"
H	10.000"
<b>Identity Data</b>	
Weight	12.000000
Transmitter Full Scale	400
Max. Flow @ 0.45"wc DP	300
Max. Flow @ 0.3"wc DP	250
MIN. Flow	30

#### 8" Valve Properties

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Clear. Material	Clear.
<b>Dimensions</b>	
V Radius	4.000"
Mean Radius	3.940"
L	24.000"
H	13.000"
<b>Identity Data</b>	
Weight	16.000000
Transmitter Full Scale	850
Max. Flow @ 0.45"wc DP	800
Max. Flow @ 0.3"wc DP	650
MIN. Flow	80
Assembly Code	

#### 10" Valve Properties

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Clear. Material	Clearance
<b>Dimensions</b>	
V Radius	5.000"
Mean Radius	4.940"
L	24.000"
H	15.000"
<b>Identity Data</b>	
Weight	20.000000
Transmitter Full Scale	1300
Max. Flow @ 0.45"wc DP	1200
Max. Flow @ 0.3"wc DP	1000
MIN. Flow	120

#### 12" Valve Properties

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Clear. Material	Clearance
<b>Dimensions</b>	
V Radius	6.000"
Mean Radius	5.940"
L	27.000"
H	17.000"
<b>Identity Data</b>	
Weight	26.000000
Transmitter Full Scale	2000
Max. Flow @ 0.45"wc DP	1800
Max. Flow @ 0.3"wc DP	1450
MIN. Flow	180

#### 14" Valve Properties


Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Clear. Material	Clear.
<b>Dimensions</b>	
V Radius	7.000"
Mean Radius	6.940"
L	30.000"
H	19.000"
<b>Identity Data</b>	
Weight	30.000000
Transmitter Full Scale	2780
Max. Flow @ 0.45"wc DP	2500
Max. Flow @ 0.3"wc DP	2300
MIN. Flow	250



## Accutrol AVC6000 Rectangle Revit Files

Revit files are isometric drawings used commonly in building construction. Accutrol provides Revit files for all AccuValve Products for use in floor plans, building diagrams, submittals, etc. The files also contain valve specific information in the properties table such as valve length, diameter Max CFM, Min CFM, etc. The Product Revit files can be found by navigating to the system documentation at [AccutrolLLC.com](http://AccutrolLLC.com).

**Note:** Make sure after installation that the keep-out zone pictured in yellow is free of obstructions.



Visibility	
Clearance	<input checked="" type="checkbox"/>
Flange	<input checked="" type="checkbox"/>
Without Flange	<input type="checkbox"/>

### Valves with Zone and Flanges:

The Revit Family shows all the Valves (12X18, 12X24, 12X36, 12X48) overlapped. The yellow keep-out zone and valve flanges can be toggled on or off for valves of any size with a Revit license.

#### 12x18" Valve Properties

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Dimensions</b>	
A	9.000"
W	17.880"
Unit W	18.000"
Unit L	30.000"
Unit H	12.000"
H	11.880"
<b>Identity Data</b>	
Weight	43.000000
Transmitter Full Scale	3300.000000
Min. flow	260.000000
Max. Flow @ 0.45"wc DP	3200.000000
Max. Flow @ 0.3"wc DP	2500.000000

#### 12x24" Valve Properties

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Dimensions</b>	
A	8.000"
W	23.880"
Unit W	24.000"
Unit L	30.000"
Unit H	12.000"
H	11.880"
<b>Identity Data</b>	
Weight	49.000000
Transmitter Full Scale	4200.000000
Min. flow	350.000000
Max. Flow @ 0.45"wc DP	4000.000000
Max. Flow @ 0.3"wc DP	3200.000000

#### 12x36" Value Properties

#### 12x48" Valve Properties



Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Material	Clearance
<b>Dimensions</b>	
A	9.000"
W	35.880"
Unit W	36.000"
Unit L	30.000"
Unit H	12.000"
H	11.880"
<b>Identity Data</b>	
Weight	97.000000
Transmitter Full Scale	6600.000000
Min. flow	520.000000
Max. Flow @ 0.45"wc DP	6400.000000
Max. Flow @ 0.3"wc DP	5000.000000

Parameter	
<b>Constraints</b>	
Default Elevation	0.000"
<b>Materials and Finishes</b>	
Material	Clearance
<b>Dimensions</b>	
A	8.000"
W	47.880"
Unit W	48.000"
Unit L	30.000"
Unit H	12.000"
H	11.880"
<b>Identity Data</b>	
Weight	109.000000
Transmitter Full Scale	8400.000000
Min. flow	700.000000
Max. Flow @ 0.45"wc DP	8000.000000
Max. Flow @ 0.3"wc DP	6400.000000